

HYCOM DATASHEET

AIRCRAFT RESERVOIR SIMULATOR FOR AIRCRAFT MAINTENANCE
MODEL HTR

IDEAL FOR

MAINTENANCE AND TROUBLESHOOTING ON HYDRAULIC TEST STANDS

MODEL

HTR - 02 - ● - ■

MAXIMUM FLOW

- = 30 : 30 USGPM
- = 60 : 60 USGPM

CONNECTIONS

- = S : SINGLE
- = S2 : DUAL

FEATURES

- Hydraulic reservoir, working pressure 4 bar
- High and low pressure gauges
- Flow control valve
- Connection for dry shop air supply, max. 8 bar
- Reservoir pressure regulator
- Solid frame with push bar, drip tray and rigid and caster wheels

TECHNICAL DATA

REQUIREMENTS FOR HYDRAULIC TEST STAND


| | |
|------------------|---|
| Fluid | Mineral or phosphate-ester based fluids |
| Maximum pressure | 5000 PSI (350 bar) |

MEASUREMENT

| | |
|---------------------|---|
| High pressure gauge | 0-400 bar / 0-5800 psi Accuracy 1,6% of full scale |
|---------------------|---|

| | |
|-----------------------|---|
| Return pressure gauge | 0-16 bar / 0-230 psi Accuracy 1,6% of full scale |
|-----------------------|---|

DIMENSIONS & WEIGHT

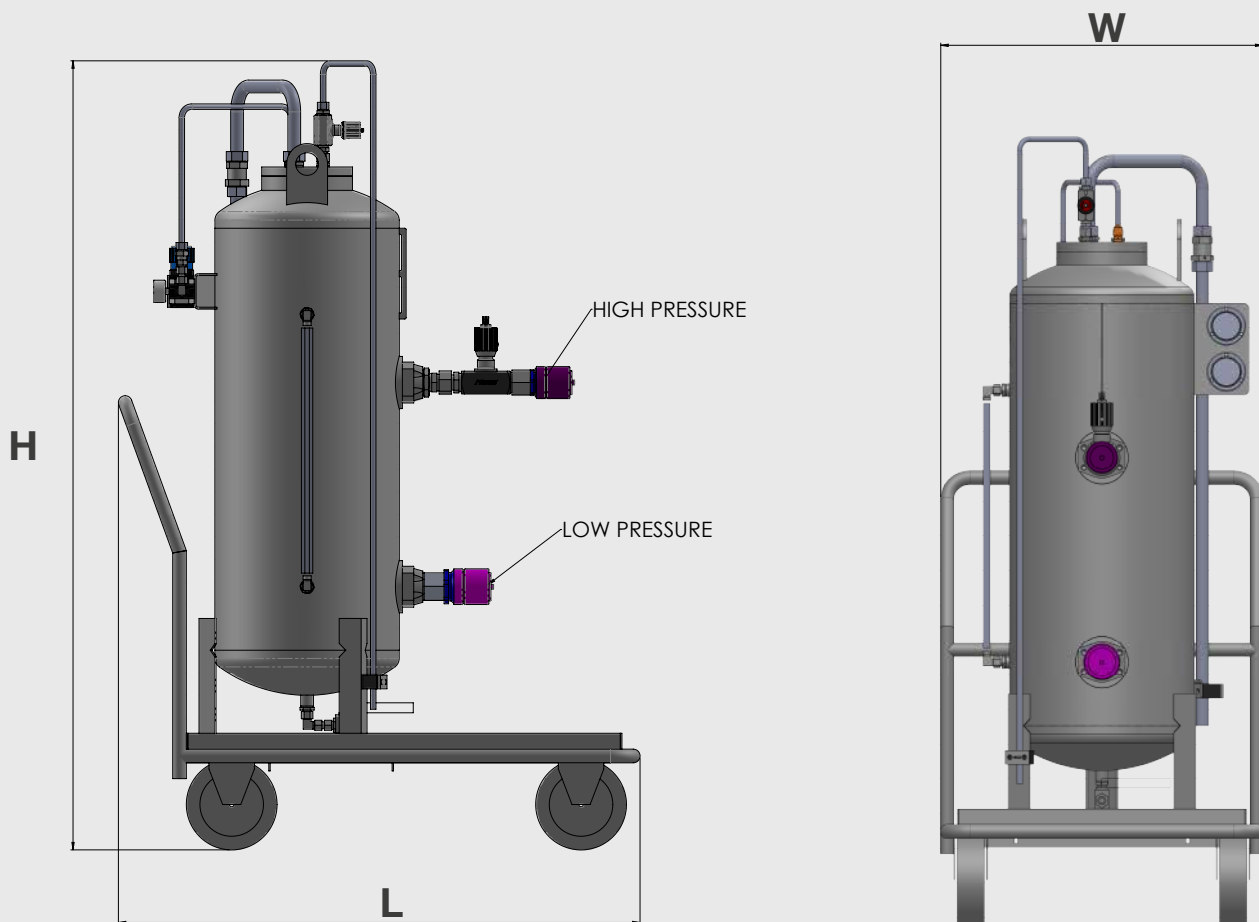

| | |
|---------------|----------------|
| LENGTH | 1150 mm |
| WIDTH | 710 mm |
| HEIGHT | 1750 mm |
| WEIGHT | approx. 200 kg |

POSSIBLE OPTIONS

Z = Quick disconnect couplings to connect the tool to the hydraulic test stand

Other options are available upon request.

IMAGES





HYCOM B.V.

P.O. BOX 1079 | 7301 BH APELDOORN
ANTILLEN 43 | 7333 PE APELDOORN

T +31 88 0597 200

E INFO@HYCOM.NL | W WWW.HYCOM.NL