

HYCOM DATASHEET

AIRCRAFT RESERVOIR SIMULATOR FOR AIRCRAFT MAINTENANCE
MODEL HTR

IDEAL FOR

MAINTENANCE AND TROUBLESHOOTING ON HYDRAULIC TEST STANDS

MODEL

HTR - 02 - ● - - ■

MAXIMUM FLOW

- = 30 : 30 USGPM
- = 60 : 60 USGPM

CONNECTIONS

- = S : SINGLE
- = S2 : DUAL

FEATURES

- Hydraulic reservoir, working pressure 4 bar
- High and low pressure gauges
- Flow control valve
- Connection for dry shop air supply, max. 8 bar
- Reservoir pressure regulator
- Solid frame with push bar, drip tray and rigid and caster wheels

TECHNICAL DATA

REQUIREMENTS FOR HYDRAULIC TEST STAND

Fluid	Mineral or phosphate-ester based fluids
Maximum pressure	5000 PSI (350 bar)


MEASUREMENT

High pressure gauge	0-400 bar / 0-5800 psi Accuracy 1,6% of full scale
---------------------	---

Return pressure gauge	0-16 bar / 0-230 psi Accuracy 1,6% of full scale
-----------------------	---



DIMENSIONS & WEIGHT

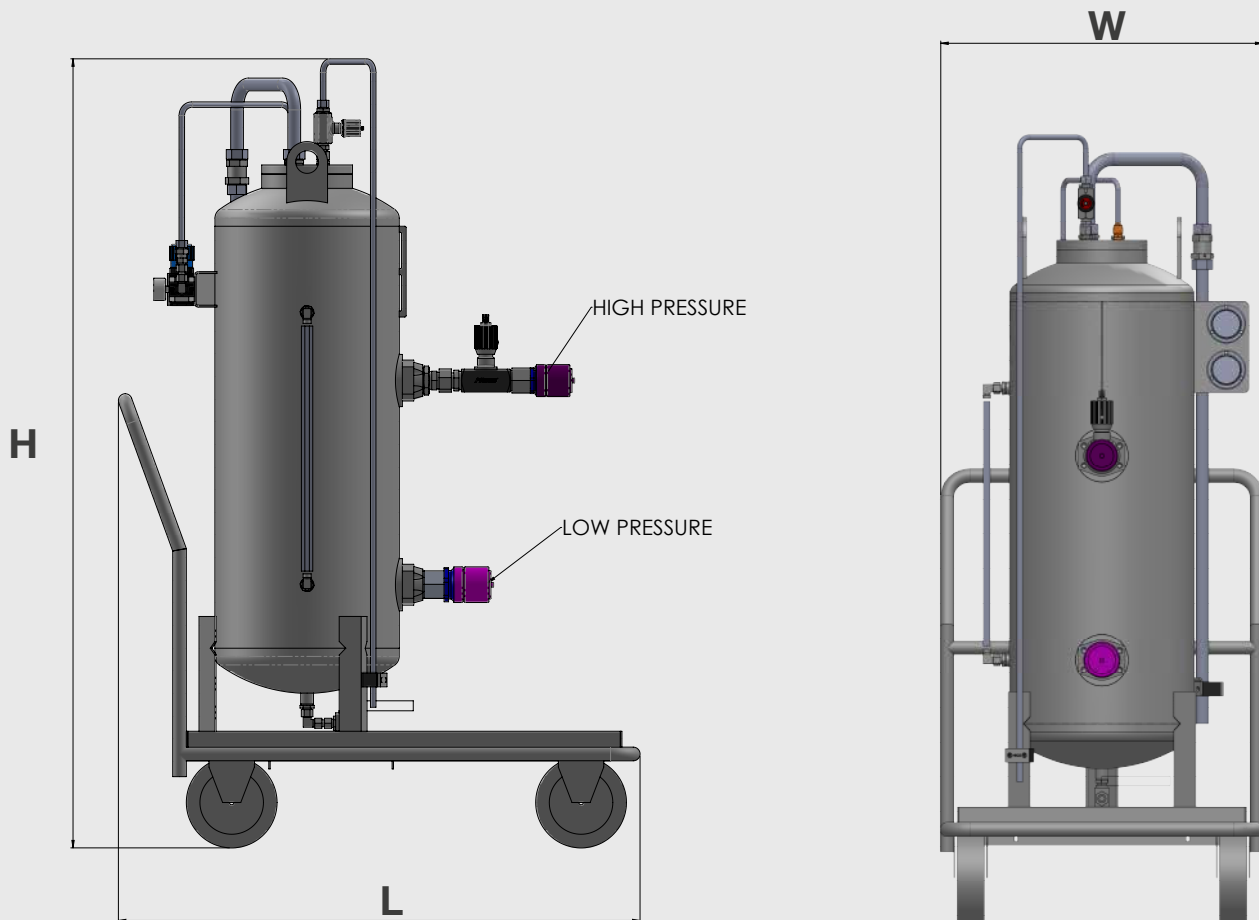

LENGTH	1150 mm
WIDTH	710 mm
HEIGHT	1750 mm
WEIGHT	approx. 200 kg

POSSIBLE OPTIONS

Z = Quick disconnect couplings to connect the tool to the hydraulic test stand

Other options are available upon request.

IMAGES





HYCOM B.V.

P.O. BOX 1079 | 7301 BH APELDOORN
ANTILLEN 43 | 7333 PE APELDOORN

T +31 88 0597 200

E INFO@HYCOM.NL | W WWW.HYCOM.NL