



# HYCOM DATASHEET

MOBILE HYDRAULIC TEST STAND FOR AIRCRAFT MAINTENANCE  
MODEL HT ELECTRIC DRIVEN

## IDEAL FOR

- MAINTENANCE AND OVERHAUL CHECKS OF AMM / ATA CHAPTER 29
- FILLING AND DRAINING OF AIRCRAFT RESER VOIR
- FLUSHING OF AIRCRAFT HYDRAULIC SYSTEM TO CLASS 6 NAS1638 OR BETTER

### MODEL

HTM - ● - E/1 - ■  
HTC - ● - E/1 - ■

### FLOW RANGE

● = 8 : 0-8 USGPM  
● = 12 : 0-12 USGPM

### OUTPUT


■ = S : SINGLE SYSTEM  
■ = S2 : DUAL SYSTEM

# FEATURES

---

- Single system (S): one pressure and one return line or
- Dual system (S2): single system with two pressure and two return lines
  
- Axial piston pump variable stroke with proportional control of flow and pressure
- Boost pump for closed loop circuit
- Stainless steel reservoir of 100 liter with drain valve and filling cap
- Fluid contamination level NAS 1638 class 6 or better
  
- Oil-air cooler with low noise level suitable for tropical conditions
- Open and closed loop configuration
- Temperature and boost pressure shut down switches
- Oil sample and calibration points
- De-aeration / flushing valve
  
- Operator panel with graphic layout, digital display with maintenance and failure indication given in clear text
- Controlled by a PLC system with safety devices and switches
- Flow setting by potentiometer. Display will indicate the value of actual flow
- Pressure setting by push buttons + and –
- 3000 psi pre-selection push button
  
- Hydraulic and electric components completely isolated from each other
- Weather proof cover for operator panel
- Canopy out of steel, spray painted
- Doors for easy maintenance
- Heavy duty frame with drip tray
  
- Lifting points, tie down and fork lift pick-up points
- Maximum towing speed 16 km/h
- Wheels with brakes

# OPERATOR PANEL

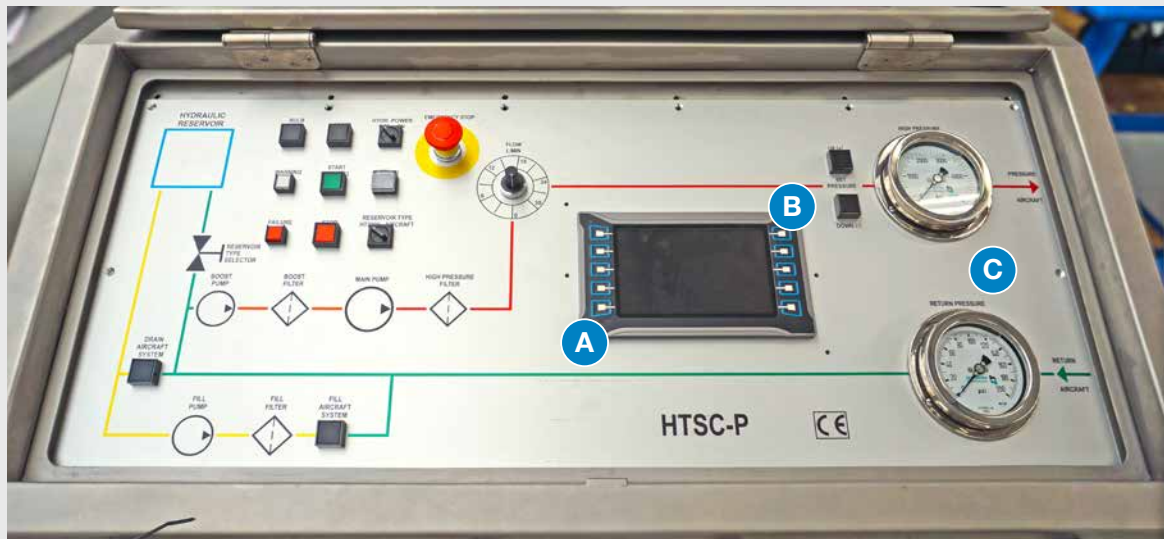

- A Digital display with failure and maintenance notifications
- B Digital readout of actual flow
- C High pressure gauge

HYCOM

# TECHNICAL DATA

---

## GENERAL

Main power supply cable	12 meter
Hydraulic hoses:	6 meter
Noise level:	Less than 75 dbA at 1 meter distance

## HYDRAULIC

Fluid HTM:	Mineral based e.g. MIL-H-5606, MIL-H-83282 or MIL-H-87257
Fluid HTC:	Phosphate ester based e.g. Skydrol or Hyjet

300-3000 psi at 8-12 USGPM, 4000 psi at reduced flow

High (3 micron) and low pressure (10 micron) filters with electric clogging indicators

## MEASUREMENT

High pressure gauge	0-5000 psi Accuracy 1% of full scale
---------------------	---

Return pressure gauge	0-200 psi Accuracy 1% of full scale
-----------------------	--

Digital readout of actual flow  
Accuracy of < 2% of measured value

## POWER

Supply	3 Ph. 380/420 V – 50 Hz, other on request
Current	22 A – 50 Hz (15 A – 60 Hz)
Electric motor	15 kW – 50 Hz (18 kW – 60 Hz)

# DIMENSIONS & WEIGHT

---

## WITHOUT TOWBAR

<b>LENGTH</b>	2160 mm
<b>WIDTH</b>	1150 mm
<b>HEIGHT</b>	1300 mm
<b>WEIGHT</b>	approx. 675 kg

## WITH TOWBAR (OPTION - T)

<b>LENGTH</b>	2300 mm
<b>WIDTH</b>	1150 mm
<b>HEIGHT</b>	1400 mm
<b>WEIGHT</b>	approx. 700 kg

# OPTIONS AND ACCESSORIES

---

- H =** Accuracy flowmeter 0,3% of actual value
- P =** 5000 psi at reduced flow
- T =** Towbar with parking brake
- Z =** Quick disconnect couplings to connect hoses to the aircraft

Other options and accessories are available upon request.

# IMAGES





**HYCOM B.V.**

P.O. BOX 1079 | 7301 BH APELDOORN  
ANTILLEN 43 | 7333 PE APELDOORN

T +31 88 0597 200

E [INFO@HYCOM.NL](mailto:INFO@HYCOM.NL) | W [WWW.HYCOM.NL](http://WWW.HYCOM.NL)