



# HYCOM DATASHEET

MOBILE HYDRAULIC TEST STAND FOR AIRCRAFT MAINTENANCE  
MODEL HT2000 electric driven

## IDEAL FOR

- MAINTENANCE AND OVERHAUL CHECKS OF AMM / ATA CHAPTER 29
- FILLING AND DRAINING OF AIRCRAFT RESER VOIR
- FLUSHING OF AIRCRAFT HYDRAULIC SYSTEM TO CLASS 6 NAS1638 OR BETTER
- HYDRAULIC SUPPLY FOR RAT TESTS WITH HYCOM GROUND CHECK MOTOR

### MODEL

HT2000 - ● - E/1 - ■

### FLOW RANGE

- = - : 0-40 USGPM
- = 1 : 0-50 USGPM
- = 2 : 0-55 USGPM

### OUTPUT


- = S : SINGLE SYSTEM
- = S2 : DUAL SYSTEM

# FEATURES

---

- Single system (S): one pressure and one return line or
- Dual system (S2): single system with two pressure and two return lines with shutoff valves
- Stainless steel reservoir of 240 liter with drain valve and filling cap
- Axial piston pump variable stroke with proportional control of flow and pressure
- Boost pump for closed loop circuit
- Fluid contamination level NAS 1638 class 6 or better
  
- Oil-air cooler with low noise level suitable for tropical conditions
- Open loop configuration for filling and draining of A/C reservoir and RAT tests
- Temperature and boost pressure shut down switches
- Oil sample point
- De-aeration / flushing valve
  
- Operator panel with graphic layout, digital display with maintenance and failure indication given in clear text
- Weather proof cover for operator panel
- Flow setting by potentiometer. Display will indicate the value of actual flow
- Pressure setting by push buttons + and –
- 3000 psi pre-selection push button
- Hydraulic and electric components completely isolated from each other
- Canopy out of steel, spray painted with phosphate-ester resistant paint
- Doors for easy maintenance
- Heavy duty frame with drip tray
  
- Lifting points, tie down and fork lift pick-up points
- Maximum towing speed 16 km/h
- Parking brake on front wheels by tow bar in upright position

# FEATURES

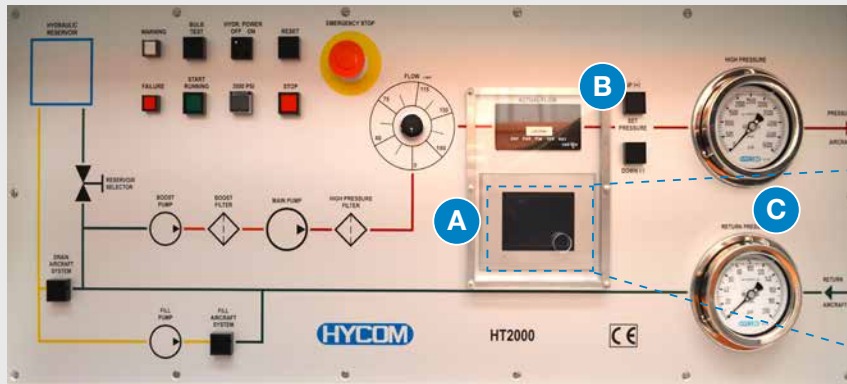

Aircraft Reservoir selected  
Oil temperature **42.3**°  
HPU Reservoir **172** Liter

- A Digital display with failure and maintenance notifications
- B Digital readout of actual flow
- C High and return pressure gauges



# TECHNICAL DATA

---

## GENERAL

Main power supply cable	12 meter
Hydraulic hoses – single system	9 meter
Hydraulic hoses – dual system	12 meter
Noise level	less than 75 dbA at 1 meter distance

## HYDRAULIC

Fluid phosphate ester based e.g. Skydrol or Hyjet  
300-3000 psi at 40-50-55 USGPM, 4000 psi at reduced flow

High (3 micron) and low pressure (10 micron) filters with electric clogging indicators

## MEASUREMENT


High pressure gauge	0-5000 psi Accuracy 1% of full scale
Return pressure gauge	0-200 psi Accuracy 1% of full scale

Digital readout of actual flow suitable for TARAN or ITCAN leak test procedures.  
Accuracy of 0,3% of measured value.

## POWER

Supply	3 Ph. 380/420 V – 50 Hz, other on request
Current	125 A – 50 Hz (100 A – 60 Hz)
Electric motor	55 kW – 50 Hz (63 kW – 60 Hz)

# DIMENSIONS & WEIGHT

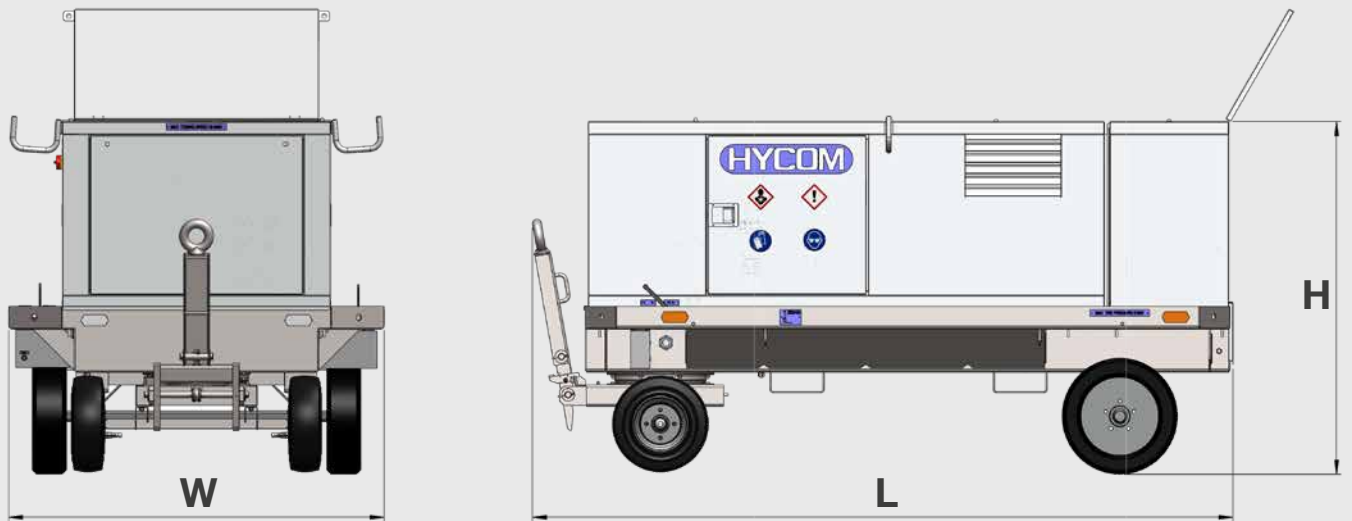

<b>LENGTH</b>	3230 mm
<b>WIDTH</b>	1750 mm
<b>HEIGHT</b>	1625 mm
<b>WEIGHT</b>	approx. 2600 kg

## POSSIBLE OPTIONS

- Z =** Quick disconnect couplings to connect hoses to the aircraft
- PUR =** Integrated purifier for filtering, degassing and dewatering
- PC =** Integrated particle counter and water sensor

Other options and accessories are available upon request.

# IMAGES





**HYCOM B.V.**

P.O. BOX 1079 | 7301 BH APELDOORN  
ANTILLEN 43 | 7333 PE APELDOORN

T +31 88 0597 200

E [INFO@HYCOM.NL](mailto:INFO@HYCOM.NL) | W [WWW.HYCOM.NL](http://WWW.HYCOM.NL)