



# HYCOM DATASHEET

MOBILE HYDRAULIC TEST STAND FOR AIRCRAFT MAINTENANCE  
MODEL HT2000 engine driven

## IDEAL FOR

- MAINTENANCE AND OVERHAUL CHECKS OF AMM / ATA CHAPTER 29
- FILLING AND DRAINING OF AIRCRAFT RESER VOIR
- FLUSHING OF AIRCRAFT HYDRAULIC SYSTEM TO CLASS 6 NAS1638 OR BETTER
- HYDRAULIC SUPPLY FOR RAT TESTS WITH HYCOM GROUND CHECK MOTOR

### MODEL

HT2000 - ● - F - ■

### FLOW RANGE

- = - : 0-40 USGPM
- = 1 : 0-50 USGPM
- = 3 : 0-60 USGPM

### OUTPUT


- = S : SINGLE SYSTEM
- = S2 : DUAL SYSTEM

# FEATURES

---

- Single system (S): one pressure and one return line or
- Dual system (S2): single system with two pressure and two return lines with shutoff valves
  
- Axial piston pump variable stroke with proportional control of flow and pressure
- Boost pump for closed loop circuit
- Stainless steel reservoir of 240 liter with drain valve and filling cap (300 liter for model HT2000-3)
- Large fuel tank for 8 hours operation
- Fluid contamination level NAS 1638 class 6 or better
  
- Oil-air cooler with low noise level suitable for tropical conditions
- Open loop configuration for filling and draining of A/C reservoir and RAT tests
- Temperature and boost pressure shut down switches
- Oil sample point
- De-aeration / flushing valve
  
- Operator panel with graphic layout, digital display with maintenance and failure indication given in clear text
- Controlled by a PLC system with safety devices and switches
- Flow setting by potentiometer. Display will indicate the value of actual flow
- Pressure setting by push buttons + and –
- 3000 psi pre-selection push button
  
- Hydraulic and electric components completely isolated from each other
- Weather proof cover for operator panel
- Canopy out of steel, spray painted with phosphate-ester resistant paint
- Doors for easy maintenance
- Heavy duty frame with drip tray
  
- Lifting points, tie down and fork lift pick-up points
- Maximum towing speed 16 km/h
- Parking brake on front wheels by tow bar in upright position

# FEATURES

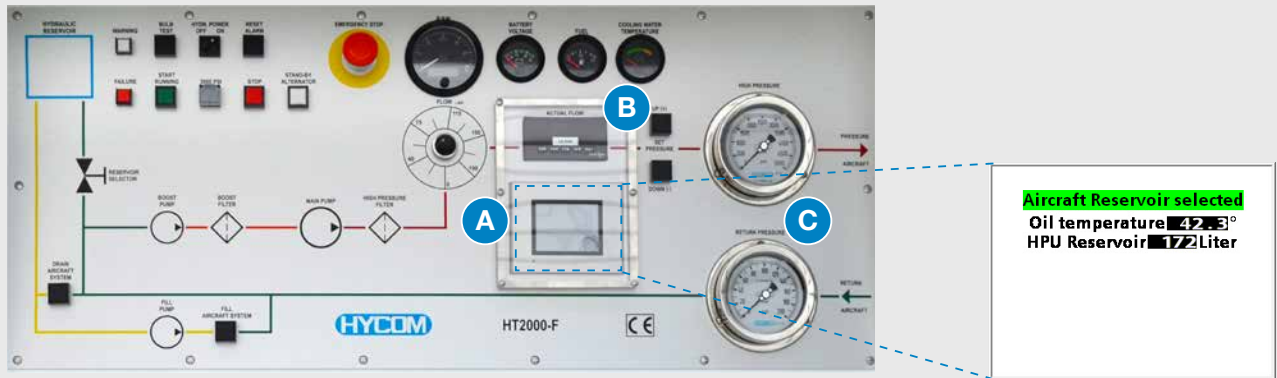

- A Digital display with failure and maintenance notifications
- B Digital readout of actual flow
- C High and return pressure gauges

# HYCOM

# TECHNICAL DATA

---

## GENERAL

Hydraulic hoses – single system:	9 meter
Hydraulic hoses – dual system:	12 meter
Noise level:	less than 86 dbA at 2 meters distance

## HYDRAULIC

Fluid phosphate ester based e.g. Skydrol or Hyjet  
300-3000 psi at 40-50-60 USGPM

High (3 micron) and low pressure (10 micron) filters with electric clogging indicators

## MEASUREMENT

High pressure gauge	0-5000 psi Accuracy 1% of full scale
---------------------	---

Return pressure gauge	0-200 psi Accuracy 1% of full scale
-----------------------	--

Digital readout of actual flow suitable for TARAN or ITCAN leak test procedures.  
Accuracy of 0,3% of measured value

## POWER

Engine	Deutz 4-stroke Tier II
Power	HT2000 and HT2000-1: 110 kW at 1800 rpm HT2000-3: 136 kW at 1800 rpm

# DIMENSIONS & WEIGHT




<b>LENGTH</b>	3680 mm
<b>WIDTH</b>	1750 mm
<b>HEIGHT</b>	1625 mm
<b>WEIGHT</b>	approx. 3400 kg

## POSSIBLE OPTIONS

- Z =** Quick disconnect couplings to connect hoses to the aircraft
- PUR =** Integrated purifier for filtering, degassing and dewatering
- PC =** Integrated particle counter and water sensor
- T4 =** Emission standard diesel engine Stage V / Tier IV Final

Other options and accessories are available upon request.

# IMAGES

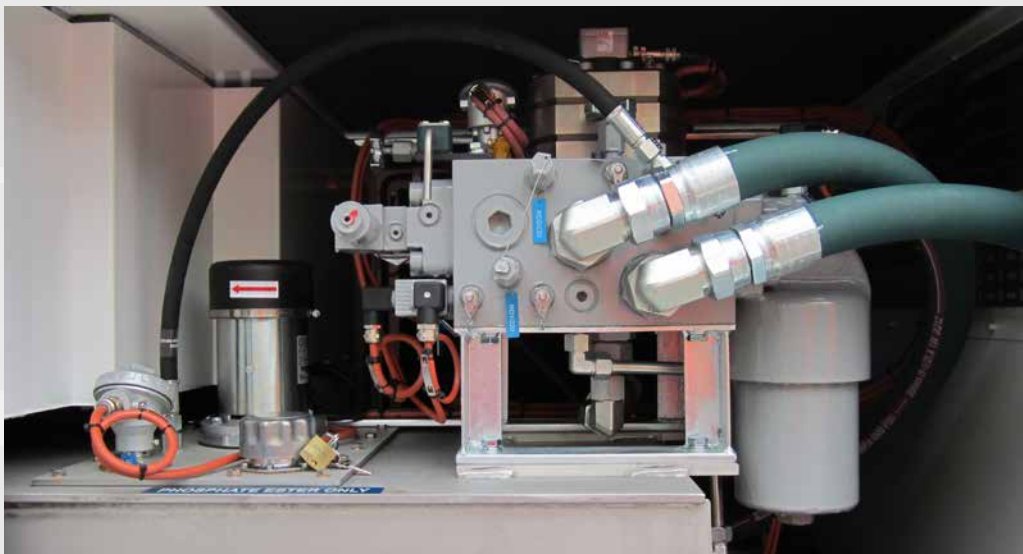



**HYCOM B.V.**

P.O. BOX 1079 | 7301 BH APELDOORN  
ANTILLEN 43 | 7333 PE APELDOORN

**T** +31 88 0597 200

**E** [INFO@HYCOM.NL](mailto:INFO@HYCOM.NL) | **W** [WWW.HYCOM.NL](http://WWW.HYCOM.NL)